



HPD SVK1000 SIL B

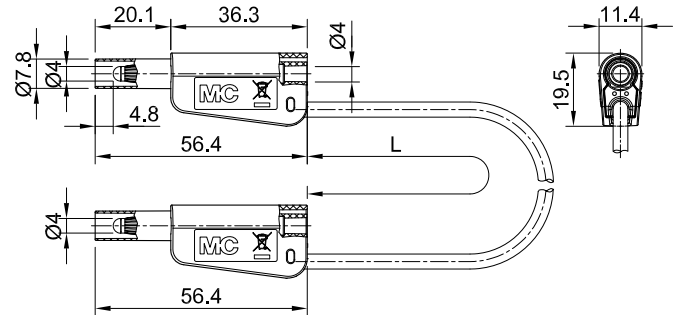

Highly flexible, with stackable \varnothing 4 mm MULTILAM plugs with rigid insulating sleeve on both ends.

Technical data	
Diameter of plug system	4 mm
Rated Values	1000 V, CAT II, 19 A / 600 V, CAT III, 19 A
Surface treatment electrical contact	Ni
Base material electrical contact	CuZn
Standard color	
Lead lengths	100 cm
Lead insulation	SIL
Lead cross section	1,0 mm ²
Test accessory acc. to	IEC EN 61010-031
Approvals	UL, CE