


# HPD SVK1000 SIL R

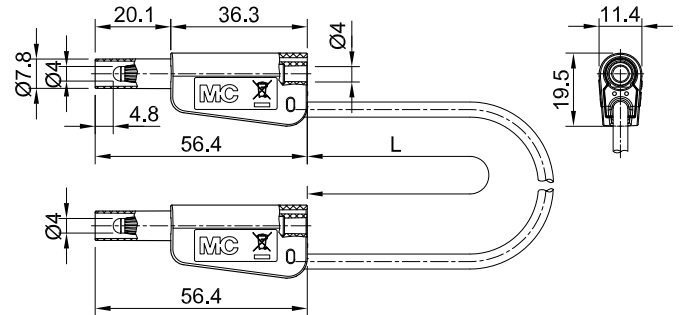

Highly flexible, with stackable  $\varnothing$  4 mm MULTILAM plugs with rigid insulating sleeve on both ends.

Technical data	
Diameter of plug system	4 mm
Rated Values	1000 V, CAT II, 19 A / 600 V, CAT III, 19 A
Surface treatment electrical contact	Ni
Base material electrical contact	CuZn
Standard color	<span style="color: red;">■</span>
Lead length	100 cm
Lead insulation	SIL
Lead cross section	1,0 mm <sup>2</sup>
Test accessory acc. to	IEC EN 61010-031
Approvals	UL, CE